


2.5 x 2.0 mm SMD Crystal Oscillator – PY Type

FEATURE

- Typical 2.5 x 2.0 x 0.9 mm ceramic SMD package.
- Tight symmetry (45 to 55%) available.
- Operation voltage: 1.8V, 2.5V, 3.3V
- Packing: Tape & Reel, 3000pcs per Reel.


TYPICAL APPLICATION

- Computer Peripherals
- Set-top Box , HDTV
- DSC, PDA




RoHS Compliant Standard

DIMENSION (mm)

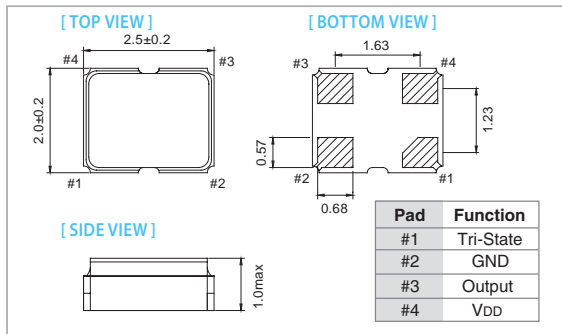

SOLDER PAD LAYOUT (mm)

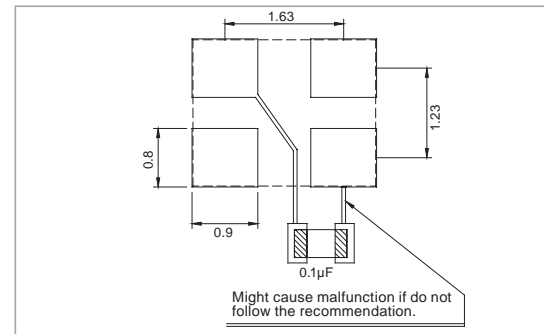

ELECTRICAL SPECIFICATION

Parameter	3.3 V		2.5 V		1.8 V		unit
	Min.	Max.	Min.	Max.	Min.	Max.	
Supply Voltage Variation (VDD) 10%	2.97	3.63	2.25	2.75	1.62	1.98	V
Frequency Range	1	200	1	166	11	133	MHz
VDD Sensitivity (±10 %)	-2	2	-2	2	-2	2	ppm
Supply Current							
1 MHz ≤ Fo < 30MHz	–	10	–	8	–	6	mA
30 MHz ≤ Fo < 75MHz	–	15	–	10	–	8	
75 MHz ≤ Fo < 133MHz	–	20	–	15	–	12	
133 MHz ≤ Fo < 166MHz	–	22	–	15	–	–	
166 MHz ≤ Fo ≤ 200MHz	–	25	–	–	–	–	
Duty Cycle	45	55	45	55	45	55	%
Output Level (CMOS) Output High (Logic "1")	90%VDD	–	90%VDD	–	90%VDD	–	V
Output Low (Logic "0")	–	10%VDD	–	10%VDD	–	10%VDD	
Transition Time: Rise/Fall Time⁺							
1 MHz ≤ Fo < 10 MHz	–	3	–	4	–	5	nSec
10 MHz ≤ Fo	–	2	–	3	–	4	
Start Time	–	2	–	2	–	2	mSec
Tri-State (Input to Pin 1) Enable	0.7 VDD	–	0.7 VDD	–	0.7 VDD	–	V
Disable	–	0.3 VDD	–	0.3 VDD	–	0.3 VDD	
Absolute Clock Period Jitter							
Specific Frequency [†]	–	40	–	40	–	40	pSec
Others	–	200	–	200	–	200	
Standby Current	–	15	–	15	–	15	µA
Aging	–	±3	–	±3	–	±3	ppm
Storage Temp. Range	-55	125	-55	125	-55	125	°C

Standard frequencies are frequencies which the crystal has been designed and does not imply a stock position.

⁺ Transition times are measured between 10% and 90% of VDD, with an output load of 15pF.

[†] Specific frequency including 4.0, 13.0, 20.0, 26.0 and 40.0 MHz.

FREQ. STABILITY vs. TEMP. RANGE

Temp. (°C)	ppm		
	±20	±25	±50
-10 ~ +60	○	○	○
-20 ~ +70	△	○	○
-40 ~ +85	×	△	○

* ○: Available △: Conditional X: Not available

* Inclusive of calibration @ 25 °C, operating temperature range, input voltage variation, load variation, aging (1st year), shock, and vibration